

# H-10 SLIDE GATE OPERATOR




SMART  
POSITIONING  
SYSTEM



**RESIDENTIAL AND COMMERCIAL**

CLASS I, II, III, & IV VEHICULAR SLIDE GATE OPERATOR

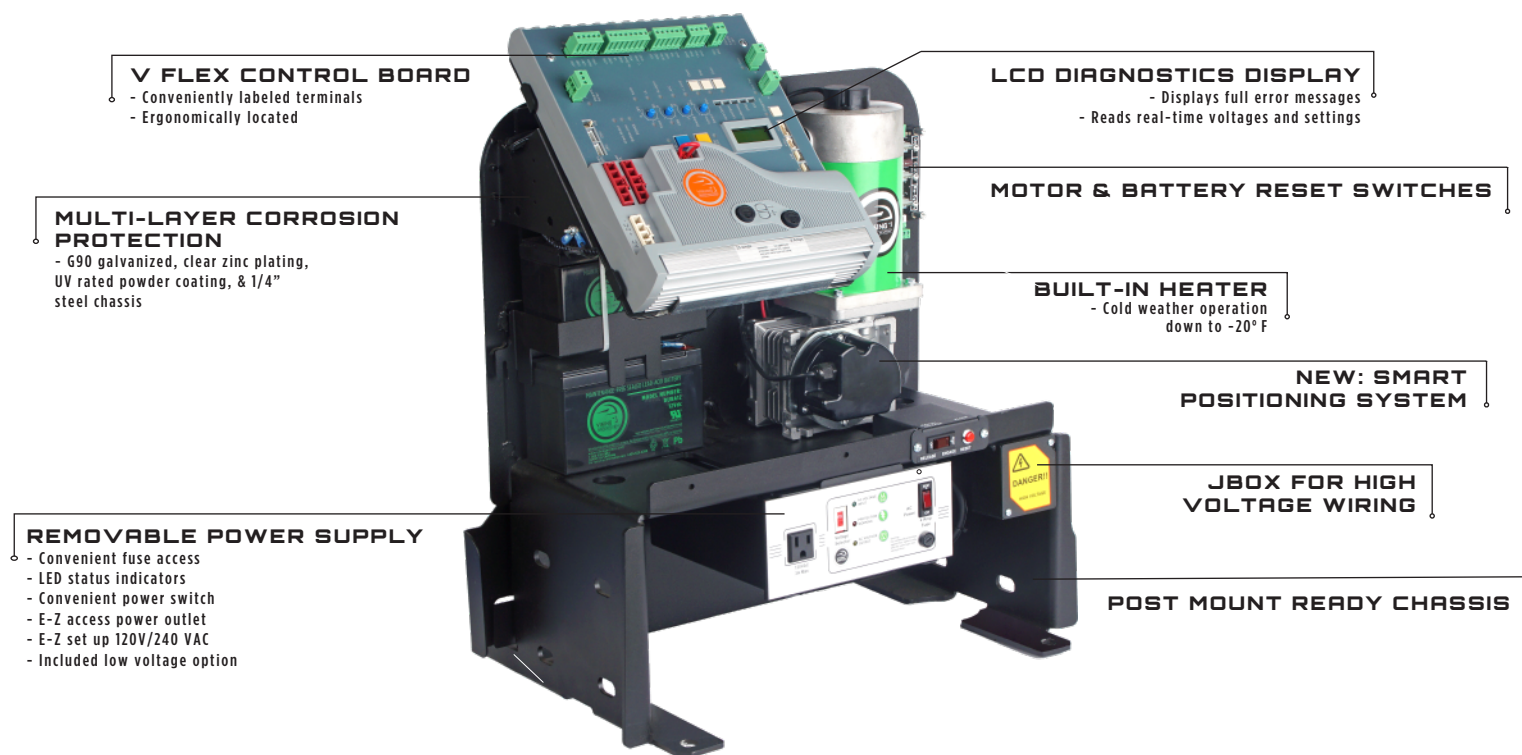

**V FLEX CONTROL BOARD**

- Conveniently labeled terminals
- Ergonomically located

**LCD DIAGNOSTICS DISPLAY**

- Displays full error messages
- Reads real-time voltages and settings

**MULTI-LAYER CORROSION PROTECTION**

- G90 galvanized, clear zinc plating, UV rated powder coating, & 1/4" steel chassis

**MOTOR & BATTERY RESET SWITCHES**

**BUILT-IN HEATER**

- Cold weather operation down to -20° F

**NEW: SMART POSITIONING SYSTEM**

**JBOX FOR HIGH VOLTAGE WIRING**

**REMOVABLE POWER SUPPLY**

- Convenient fuse access
- LED status indicators
- Convenient power switch
- E-Z access power outlet
- E-Z set up 120V/240 VAC
- Included low voltage option

**POST MOUNT READY CHASSIS**

**COMPATIBLE WITH VIKING WIRELESS PRODUCTS**

- Plug & Play connection for the Viking wireless accessory products.
- Viking Konnect - Wireless Kit provides secure and reliable wireless dual gate communication when the application requires two gate operators working in tandem.
- Viking Monitor - Remote access to the control board settings, operator diagnostics, controls, gate status and error notifications, all from the convenience of a computer or any compatible hand held device

**BATTERY BACKUP INCLUDED**

- Standard Battery Backup provides 100 continuous cycles at 100% duty cycle.
- With Viking's "True" Battery Backup System, batteries are not used during normal operations, maximizing battery life.

**LIGHTNING PROTECTION**

- Advanced lightning strike protection up to 20,000 volts / 10,000 amps
- On-board surge protection monitoring.

**ADAPTIVE DIGITAL LIMITS**

- Ensures consistency at the end of travel of the gate

**SMART POSITIONING SYSTEM**

- Gate position detection, regardless of power status.
- Limits are retained even after manual operation during complete power failure



**PROTECTION**

- Multi-Layer Corrosion Protection
- G90 Galvanized
- Clear Zinc Plating
- UV Rated Powder Coating
- 1/4" Steel Chassis

**INTEGRATED HEATER**

- Built-in heater for operating temperatures down to -20° F.
- This will allow you run your operator in the coldest conditions.

**DIAGNOSTICS DISPLAY**

- On-board LCD screen displays voltages, amps, gate status and diagnostics.

**SAFETY COMPLIANCE**

- Conforms to ANSI/CAN/UL325

Operational Voltage	24 VDC with 1 HP Motor
Main Power Source Options	120/240 VAC Single Phase
Battery	7 AmpHr 12 VDC x 2
Battery Backup	100 Full Contin. Cycles (2200 lbs)

Operating Speed	12" Per Second
Operating Temperature	-20° F up to +160° F
Max Gate Capacity	2200 Lbs/ 75'
Max Duty Cycle	100% Contin. Cycle



Power Door Products

(914) 698-5083

www.PowerDoorProducts.com